

**JASPER
ELECTRONICS**



CONTACT

1580 No. Kellogg Dr.
Anaheim, California, 92807
(714) 917-0749
www.jasperelectronics.com
sales@jasperelectronics.com

BPA-RT3800-Series

Single or 3 Phase Output



JBPA SERIES FRONT VIEW

GENERAL OVERVIEW

The JBPA-RT3800-Series are a highly reliable, 3800W, AC to DC, redundant power supply module. With 180 - 528 VAC in single phase, 3 phase Delta and 3 phase Y inputs. These power supply modules achieve the highest performance and efficiency by incorporating digital control interleaved PFC and phase-shift full bridge technology. The JBPA-RT3800 family also includes PMBus™ interface to monitor and control all essential functions of the power supply module. Custom controls available.

SPECIAL FEATURES:

- High efficiency up to 93.0%
- Active Power Factor Correction
- Dimensions: 203.2 x 40.2 x 292.1 mm. (8.0 x 1.58 x 11.5 in.)
- Wide input voltage range: 180 – 528VAC
- Single Phase
- 3 Phase Delta
- 3 Phase Y
- Redundant operation
- Adjustable Output Voltages
- Optional fan airflow direction
- Variable fan speed control
- Series and Parallel Wiring Possible
- Fully secure(OTP, OVP, OCP, SCP)
- LEDs Status :OK, Fault, Warning
- AC OK, DC OK, Alert Signals
- CE Compliant
- RoHS Compliant
- Active Monitoring for Series Operation
- (Optional) Output Shunt FET Module
- (Optional) PS_ON
- Three Year Warranty
- Approved to latest edition of the following Safety Standards: UL/cUL, and DEMKO (To be submitted)
- Custom modifications available

APPLICATIONS

- Battery Charger
- LED Lighting
- Routers
- Switches (POE)
- Telecommunication
- Industrial Application

Output Configurations Available 4-400VDC

TOTAL POWER	INPUT VOLTAGE	OUTPUT VOLTAGE	MINIMUM	MAXIMUM
3800W	180-528 VAC	VO1	0A	313A
		12VSB	0A	2.0A

Single Phase 200-180VAC Derated 3800-3000W
Maximum Input Current 19.5A
Maximum Output Current 313A



ISO9001:2015

American Systems
REGISTRAR

Rev A-February-22-2024

TECHNICAL SPECIFICATIONS

INPUT					
Parameter	Description/ Condition	Min	Nom	Max	Units
$V_{i\ nom}$	Nominal Input Voltage	180		528	VAC
$I_{i\ max}$	Max Input Current			19.5	A_{rms}
$I_{i\ p}$	Inrush Current			32	A_p
	Leakage Current			1.0	mA
F_i	Input Frequency	47	50/60	63	Hz
PF	Power Factor		0.95		W/VA
$V_{i\ on}$	Turn-On Voltage	174		178	VAC
$V_{i\ off}$	Turn-Off Voltage	160		170	VAC
Power _i	Input Power			4300	W
			90		
η	Efficiency without Fan		93		%
			91.5		
T_{hold}	Hold-up Time	16			ms

*Specifications subject to change without notice.

1.1 INPUT FUSE

An internal 20A input fuse, in series with the input line, protects against severe defects.

1.2 INRUSH CURRENT


When the power supply module is connected to the main input, it exhibits a low and short peak current due to an X-capacitances initial charge. The internal bulk capacitor is charged through a controlled NTC circuit which will limit the inrush current.

1.3 INPUT UNDER-VOLTAGE

If the input voltage stays below the specified input voltage range for more than 10 seconds the main output will shut down. The power supply module will automatically return to normal operational condition when the input voltage returns to the specified range.

1.4 POWER FACTOR CORRECTION

Power factor correction (PFC) is achieved by controlling the input current waveform synchronous with the input voltage. A fully digital controller is implemented giving outstanding PFC results over wide input voltage and load ranges.

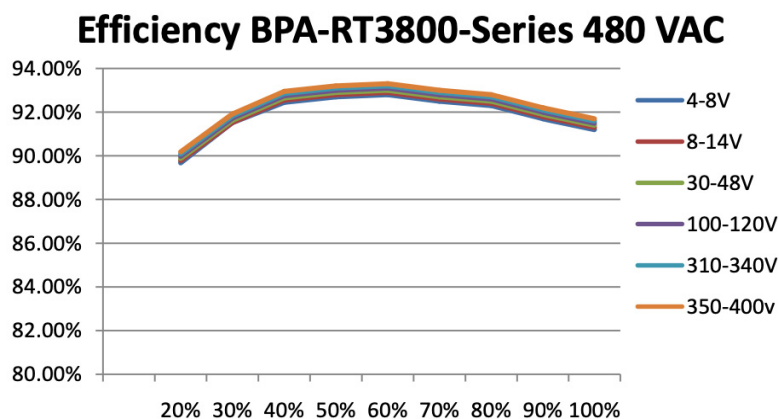

TECHNICAL SPECIFICATIONS

OUTPUT						
Parameter	Description/ Condition	Min	Nom	Max	Units	
Main Output V_1						
$V_{1\text{nom}}$	Nominal Output Voltage	Varies depending on Output Model selected		400	Vdc	
$V_{1\text{set}}$	Output Setpoint Accuracy	-0.1		0.1	V_1	
$P_{1\text{nom}}$	Nominal Output Power	VO1		3800	W	
$I_{1\text{nom}}$	Nominal Output Current	VO1(Based on Output Voltage)		313	A_{DC}	
$V_{1\text{pp}}$	Output Ripple Voltage	$V_{1\text{nom}}, I_{1\text{nom}}, 20\text{MHz BW}$		1	mV_{pp}	
$Dv_{1\text{Load}}$	Load Regulation	-2		.2	%V	
$Dv_{1\text{Line}}$	Line Regulation	-0.1		0.1	%V	
$Dv_{1\text{tot}}$	Total Regulation	-1		1	% V_1	
DI_{share}	Current Sharing	when Bus load \geq (20%)		5	%A	
DI_{share}	Current Sharing	when Bus load < (20%)		10	%A	
Dv_{dyn}	Dynamic Load Regulation	I_{out} : 10%-60% of full load; 50--100% of full load		2.5	%V	
T_{rec}	Recovery Time	$di/dt = 1A/\mu s$, recovery within 1% of $V_{1\text{nom}}$		1	ms	
t_{ACV1}	Start-Up Time from AC	Varies with Input Line		3.5	sec	
$tV_{1\text{rise}}$	Rise Time	$V_1 = 10\% \dots 90\% V_{1\text{nom}}$		100	ms	
C_{Load}	Capacitive Loading	$T_{\text{amb}} = 25^\circ\text{C}$		∞	μF	
Standby Output V_{SB}						
$V_{SB\text{nom}}$	Nominal Output Voltage	$0.5 \cdot I_{1\text{nom}}, T_{\text{amb}} = 25^\circ\text{C}$		12.0	Vdc	
$V_{SB\text{set}}$	Output Setpoint Accuracy	$0.5 \cdot I_{1\text{nom}}, T_{\text{amb}} = 25^\circ\text{C}$.3	V_{SB}	
$P_{SB\text{nom}}$	Nominal Output Power	$V_{SB} = 12_{VDC}$		24	W	
$I_{SB\text{nom}}$	Nominal Output Current	$V_{SB} = 12_{VDC}$		2.0	A_{DC}	
$V_{SB\text{pp}}$	Output Ripple Voltage	$V_{SB}, I_{SB}, 20\text{MHz BW}$		120	mV_{pp}	
$Dv_{SB\text{tot}}$	Total Regulation	-3		3	%V	
Dv_{SB}	Droop	0-100% $I_{SB\text{nom}}$.3	%V	
$dV_{SB\text{dyn}}$	Dynamic Load Regulation	$\Delta I_{SB} = 50\%, I_{SB\text{nom}}, I_{SB} \dots 100\% I_{SB\text{nom}}$		0.3	%V	
T_{rec}	Recovery Time	$di/dt = 1A/\mu s$, recovery within 1% of $V_{SB\text{nom}}$		1.2	μs	
t_{ACVSB}	Start-Up Time from AC	Varies with Input Line		1.2	sec	
$tV_{SB\text{rise}}$	Rise Time	$V_{SB} = 10\% \dots 90\% V_{SB\text{nom}}$		20	ms	
C_{Load}	Capacitive Load	$T_{\text{amb}} = 25^\circ\text{C}$		10000	μF	

*Specifications subject to change without notice.

2.1. OUTPUT VOLTAGE RIPPLE

Ripple and noise are measured with 0.1 μF of ceramic capacitance and 10 μF of tantalum capacitance on each of the outputs

PROTECTION					
Parameter	Description/ Condition	Min	Nom	Max	Units
F _{1,2,3}	Input Fuses	Not User Accessible		20	A
V _{1OV}	Over Voltage Threshold V ₁	110		120	Vdc
t _{OVV1}	Over Voltage Latch Off Time V ₁			1	ms
V _{SB OV}	Over Voltage Threshold V _{SB}	13.2		14.4	Vdc
t _{OVVSB}	Over Voltage Latch Off Time V _{SB}			1	ms
I _{V1 lim}	Current Limit	105		110	A
V _{1SC Max}	Short Circuit Current V ₁	I _{nom} Depending on Model Selected		200	A
t _{V1SC off}	Short Circuit Latch Off Time	Time to latch off when in Short Circuit		2	s
T _{SD}	Over Temperature Protection	Internal Temperature		120	°C
	Recovery Temperature		70		°C
I _{VSB lim}	Standby Current Limit	Auto Recovery		3	A

*Specifications subject to change without notice.

3.1 OVERVOLTAGE PROTECTION

The power supply module will shut down if the output voltage exceeds the over voltage threshold. The power supply module must be manually repowered by recycling AC Source, by toggle PS_ON, or Pmbus™ operation command.

3.2 UNDERVOLTAGE PROTECTION

The power supply module will shutdown if the output voltage falls below undervoltage threshold (90% of VO1 lowest adjustable voltage or 90% of V01 with fixed voltage) for more than 2 second. The power supply module must be manually repowered by recycling AC Source, by toggle PS_ON*, or PMBus™ operation command.

3.3 OVERLOAD PROTECTION*

Constant current until the undervoltage threshold point (90% of VO1 lowest adjustable voltage or 90% of V01 with fixed voltage). The power supply will turn off when it falls under the undervoltage threshold on the primary output for longer than 2 second. The 12V standby utilizes the hiccup method. . The power supply module must be manually repowered by recycling AC Source, by toggle PS_ON*, or PMBus™ operation command.

3.4 SHORT-CIRCUIT PROTECTION*

Constant current for 2 second then the main output shut down. The 12V standby utilizes the hiccup method. The power supply module must be manually repowered by recycling AC Source, by toggle PS_ON*, or PMBus™ operation command.

3.5 OVER TEMPERATURE PROTECTION

The power supply module will shut down if temperature exceeds the over temperature threshold (internal temperature). The power supply module will automatically restart when temperature falls below recovery temperature threshold. The power supply module can also be manually repowered by recycling AC Source, by toggle PS_ON*, or PMBus™ operation command.

*Can only be repowered by PS_ON if selected as an option.

SAFETY/ APPROVAL				
Parameter	Description/ Condition	Min	Max	Units
Agency Approvals	Approved to the latest edition of the following standards: UL/cUL 60950-1 IEC/EN 60950-1		Approved By independent Body	
Isolation Strength	Input(L/N) to case (PE) Input (L/N) to output Output to Case (PE)	2000 4000 500	Basic Reinforced Functional	Vrms Vrms VDC
Electrical Strength Test	Input to Case Input to Output	2828 5656		VDC VDC

ELECTROMAGNETIC COMPATIBILITY		
Parameter	Description/ Condition	Criterion
ESD Contact Discharge	IEC/EN61000-4-2, Level 2 ±4kV	A
Radiated Electromagnetic Field	IEC/EN61000-4-3,Level 2 (3V/m) 80-1000MHz, 1.4-2.0GHz, A Level 1 (1V/m) 2.0-2.7GHz	A A
Electrical Fast Transients/ Burst	IEC/EN61000-4-4,level 2 AC port ±1kV,1 minute	A
Surge	IEC/EN61000-4-5, Level 2 AC port± 1kV,1 min CM, Level 3 AC port ± 2kV,1 min CM	A A
RF Conducted Immunity	IEC/EN 61000-4-6,Level 2, 3 V,CW,0.15 ... 80MHz Amplitude Modulation 1kHz/80%	A
Magnetic Field Immunity	IEC/EN 61000-4-8,Level 2 3A/m	A
Voltage Dips and Interruptions	IEC/EN61000-4-11 1.0% residual voltage, 0.5 cycle 2.0% residual voltage, 1 cycle 3.40% residual voltage, 5 cycles 4.70% residual voltage, 0.5 cycle 5.70% residual voltage, 25 cycles/50Hz 6.0% residual voltage, 250 cycles/50Hz	A B B A B B

*Specifications subject to change without notice.

EMISSION		
Parameter	Description/ Condition	Criterion
Conducted Emissions	EN 55022 / EN 55016-2-1 conducted	Class A
Radiated Emission	EN 55022 / EN 55016-2-3 radiated	Class A
Harmonics Emission	IEC61000-3-2,V _{in} =230VAC/50Hz,100% Load	Class A
	46dB at 1 meter, 25 C , 50% Load	—
AC Flicker	IEC61000-3-3,V _{in} =230VAC/50Hz,100% Load,<20Arms	Pass

*Specifications subject to change without notice.

ENVIRONMENTAL					
Parameter	Description/ Condition	Min	Nom	Max	Units
T _A Ambient Temperature	V _{i min} to V _{i max,I1 nom,I5B nom}	-20		70*	°C
T _S Storage Temperature	Non-Operational	-40		85	°C
Altitude	Operational, Above Sea Level		5000 16400		Meter Feet
RH Humidity	Non-Condensing	5		95	%
NA Audible Noise	V _{i nom} , 50% I _{o nom} , T _a =25°C		42		dBa

*Specifications subject to change without notice.

*Derating linearly from 51° -70°C @ 50% load.

SIGNALS AND CONTROLS						
Parameter		Min	Nom	Max	Units	
<i>PS_ON (Optional)</i>						
V _{IL}	Input Low Level Voltage	0		0.8	V	
V _{IH}	Input High Level Voltage	2.4		3.3	V	
R _{puPS_ON}	Internal Pull Up Resistor on PS_ON		0		kΩ	
<i>AC_OK/DC_OK/Alert</i>						
V _{IL}	Input Low Level Voltage	0		0.8	V	
V _{IH}	Input High Level Voltage	2.4		3.3	V	
I _{IL,H}	Maximum Input Sink or Source Current	0		10	mA	
R _{puAC_OK}	Internal Pull Up Resistor on AC_OK		none		kΩ	
R _{puDC_OK}	Internal Pull Up Resistor on DC_OK		none		kΩ	
R _{puAlert}	Internal Pull Up Resistor on Alert		none		kΩ	
<i>SCL_1/SDA_1</i>						
V _{IL}	Input Low Level Voltage	0		0.8	V	
V _{IH}	Input High Level Voltage	2.4		3.3	V	
I _{IL,H}	Maximum Input Sink or Source Current			0.25	mA	
R _{puSCL_1}	Internal Pull Up Resistor on SCL_1		100		kΩ	
R _{puSDA_1}	Internal Pull Up Resistor on SDA_1		100		kΩ	
<i>A0/A1</i>						
V _{IL}	Input Low Level Voltage	0		0.8	V	
V _{IH}	Input High Level Voltage	2.4		3.3	V	
R _{puA0}	Internal Pull Up Resistor on A0		100		kΩ	
R _{puA1}	Internal Pull Up Resistor on A1		100		kΩ	

*Specifications subject to change without notice.

7.2 PS_ON (OPTIONAL)

The PS_ON signal is used to remotely enable/disable the main output V1 of the front-end. This active-low pin is also used to clear any latched fault condition.

7.3 AC_OK

The AC_OK is an open collector signal with an active-high when the AC input voltage is above 178VAC and an active-low when the ac voltage falls outside the requirements for more than 10ms.

7.4 DC_OK

The DC_OK is an open collector signal with an active-high that indicating whether both VSB and V1 outputs are within regulation. This pin is active-low when V1 and VSB are not within regulation.

7.5 CURRENT SHARE (VCS)

When used in a redundant configuration, all the current share pins need to be interconnected in order to activate the sharing function. If a supply has an internal fault or is not turned on, the current share line will automatically disengage from the bus.

-If current share is not required the current share pin can be left open.

7.6 SERIES_CS(FOR SERIES CONNECTION CURRENT MONITORING)

When signal is interconnected with other supplies in series, in case of a power supply failing, the Series_CS will turn off other power supplies connected in series if load exceeds 10% over max output current.

7.7 REMOTE SENSE (+VS AND -VS)

The main output incorporates sense lines to compensate for voltage drop across the load line.

1. (+) Sense connects to the positive rail of the equipment used. Maximum voltage drop of 200mV.
2. (-) Sense connects to the negative rail of the equipment used. Maximum voltage drop of 200mV.

If remote sense is not required the (+) Sense and (-) Sense pins can be left open.

7.8 ALERT

Fault/Warning - An open collector signal is provided to indicate any fault or warning such as over temperature, overvoltage, over current, undervoltage, and fan fault.

FRONT LED					
Power Supply Condition	Alert State	Green LED	Yellow LED	AC_OK	DC_OK
Normal Operation	High	On	Off	High	High
Standby Mode	High	Blink	Off	High	Low
<i>PSU Faults Condition</i>					
Input UnderVoltage	Low*	Off	On	Low	Low
Output OverVoltage	Low	Off	On	High	Low
Fan	Low	Off	On	High	Low
Over Temperature	Low	Off	On	High	Low
Output Over Current	Low	Off	On	High	Low
<i>PSU Warning Condition</i>					
Over Temperature	Low	On	Blink	High	High
Fan Speed (Low Speed)	Low	On	Blink	High	High
Output Over Current	Low	On	Blink	High	High
Input Undervoltage	Low	On	Blink	Low	High
AC Below Turn on Point	Low	Off	Blink	Low	High


*Specifications subject to change without notice.

*For Faults the power supply module must be manually repowered by recycling AC Source, by toggle PS_ON, or PMbus™.

WARNINGS				
PSU Warning Triggers	Min	Nom	Max	Units
Over Temperature		115		°C
Fan Speed (Low RPM)	2400	2500	2600	RPM
Output Over Current	102		105	%A
Input Undervoltage		175		VAC

7.9 SDA & SCL

The I²C bus consist of a Serial Clock (SCL) and a Serial Data Line (SDA). Both signals lines are pull up internally to 3.3V bus via 6.8k ohm resistors, if customer requires stronger pull up resistors, it is possible to install additional pull up resistors in the customer's backplane.

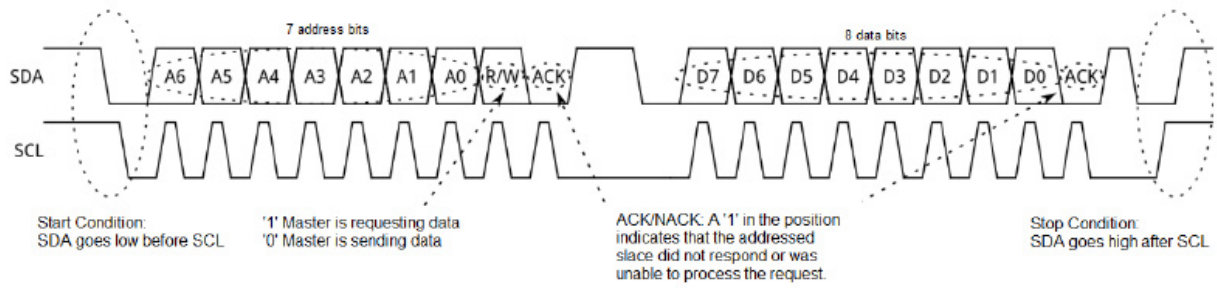


7.10 ADDRESS SELECT (A0,A1)

These digital input lines are used to set the address of the power supply module. These addresses are used to differentiate between multiple power supply modules utilize in a redundant mode within the same system.

7.11 PSU ADDRESS TABLE (ADDRESS BIT SETTINGS)

A0 & A1	PSU ADDRESS VALUE	A1	A0	RECOGNIZE ADDRESS
00h	B0h	0	0	Yes
01h	B2h	0	1	Yes
02h	B4h	1	0	Yes
03h	B6h	1	1	Yes

7.12 TIMING GRAPH

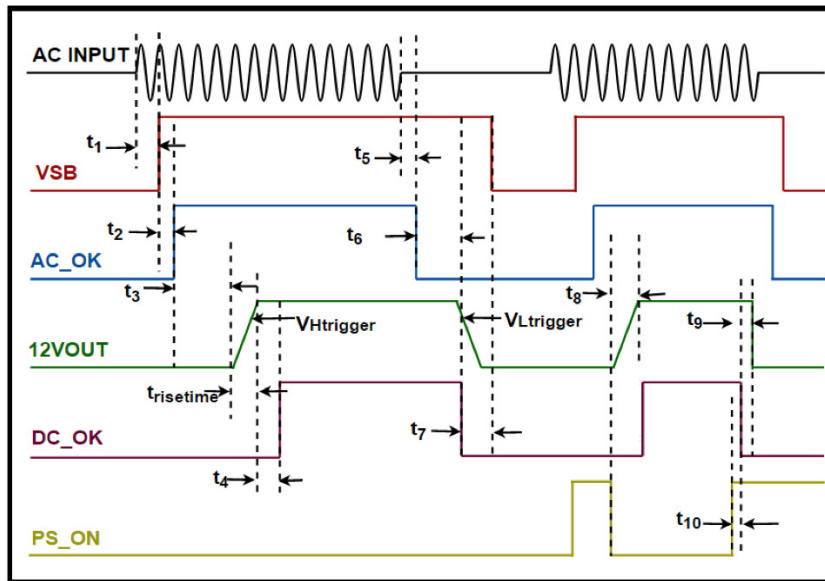

TIMING GRAPH						
Parameter	Description/ Condition	Min	Nom	Max	Units	
V _{rsetime}	VOUT,0V to VO1	80	100	120	ms	
V _{Htrigger}	DC_OK(high)	Varies due to Load		95	-	100 %V
V _{Lrisetime}	DCOK(low)	Varies due to Load		90	-	95 %V
<i>Turn-On</i>						
t ₁	AC INPUT — VSB	Varies Due to Line and Load		400	Varies	1000 ms
t ₂	VSB - AC_OK	-	230	300	ms	
t ₃	AC_OK-VOUT	Varies Due to Line and Load		.4	1.5	s
t ₄	VOUT-DC_OK	100	-	150	ms	
t ₈	PS_ON(low) — VOUT	PS_ON Turn-ON		.8	-	1.5 s
<i>Turn-Off</i>						
t ₅	AC INPUT — AC_OK	AC_IN Turn-Off		14.8	-	- ms
t ₆	AC_OK-DC_OK	AC_IN Turn-Off Varies due to Load		3	-	- ms
t ₇	DC_OK-VSB	AC In Turn-off Varies due to Line and Load		66	-	- ms
t ₉	DC_OK— VOUT	PS_ON Turn-Off		400	440	480 μs
t ₁₀	PS_ON(high)— DC_OK(low)	PS_ON Turn-Off		-	10	- ms

PMBUS™ FUNCTIONALITY SUPPORTED BY PSU(PMBUS™ INFO)

Address	Commands	Description	Supported	Transaction Type	Byte_Size
01h	Operation_ON_OFF	Used to enable or disable the output of the PSU depending value of the second byte that follows.	Y	Read/Write	2-bytes
03h	Clear_Fault	Used to clear all status registers and error flags. This command also affects the SMB_ALERT signal.	Y	Write Only	1-byte
19h	Capability	Used by the end user system to query the PSU, to determine if it supports certain features, or not. Features such packet error checking, SMB_ALERT and the max SMBUS clock rate.	Y	Read Only	1-byte
20h	VOUT_Mode	Sets/reads the formats (Linear, VID, Y and Direct) and exponents for VOUT related commands.	Y	Read Only	1-byte
3Bh	Fan_Command_1	Used by the end user system to override the fan speed versus temperature algorithm of the PSU, so that the system can set the fan speed to where ever it requires within the limits of the fan specification.	Y	Read/Write	2-bytes
78h	Status_Byte	Used to retrieve and report one byte containing a summary of the most critical faults. All bits in this register should read as zero when the PSU is operating normally.	Y	Read/Write	1-byte
79h	Status_Word	Used to retrieve and report two bytes containing a summary of faults conditions. All bits in this register should read as zero when the PSU is operating normally. This register acts as an index to all the other status registers.	Y	Read/Write	2-bytes
7Ah	Status_VOUT	Used to retrieve and report the status of the output voltages. It reports information such as output under-voltage, output over-voltage, output under voltage-warning	Y	Read/Write	1-byte
7Bh	Status_IOUT	Used to retrieve and report the status of the device output current. It relays information, such as output over current conditions, exceeded and output current approaching it maximum rating.	Y	Read/Write	1-byte
7Ch	Status_INPUT	Used to retrieve and report the status of the device input. It relays information, such as input over current, input over power, input OVP rating exceeded and input current approaching it maximum rating.	Y	Read/Write	1-byte

Address	Commands	Description	Supported	Transaction Type	Byte_Size
7Dh	Status_Temperature	Used to retrieve and report the status of the device operating temperatures both ambient and heat-sinks.	Y	Read/Write	1-bytes
7Eh	Status_CML	Used to retrieve and report the status of the I2C or SMBUS communication bus; error such as packet error checking (PEC), receive an unsupported command etc...	Y	Read/Write	1-byte
81h	Status_Fans_1&2	Used to retrieve and report the operating status of fan_1 & 2.	Y	Read/Write	1-byte
88h	Read_VIN	Used to retrieve a two bytes value in Little Endian format representing the active input voltage of the device in a linear format ($VIN = Y * 2^n$), where n is the exponent in two's compliment represented by the five most significant bits of the upper byte. Y is the mantissa represented the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
89h	Read_IIN	Used to retrieve a two bytes value in Little Endian format representing the active input current of the device in a linear format ($IIN = Y * 2^n$), where n is the exponent in two's compliment represented by the five most significant bits of the upper byte. Y is the mantissa represented the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
8Bh	Read_VOUT	Used to retrieve a two bytes value in Little Endian format representing the active output voltage of the device in a linear format ($VOUT = Y * 2^n$), VOUT is a special case where the mantissa and the exponent are not combined, but listed separately.	Y	Read Only	2-bytes
8Ch	Read_IOUT	Used to retrieve a two bytes value in Little Endian format representing the active output current of the device in a linear format ($IOUT = Y * 2^n$), where n is the exponent in two's compliment represented by the five most significant bits of the upper byte. Y is the mantissa represented the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
8Dh	Read_Temperature_1	Used to retrieve a two bytes value in Little Endian format representing the air intake ambient temperature of the device in a linear format ($Temp_1 = Y * 2^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
8Eh	Read_Temperature_2	Used to retrieve a two bytes value in Little Endian format representing the air exhaust ambient temperature of the device in a linear format ($Temp_2 = Y * 2^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
DAh	Read_Temperature_3	Used to retrieve a two bytes value in Little Endian format representing the heat-sink temperature of the device in a linear format ($Temp_3 = Y * 2^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
DBh	Read_Temperature_4	Used to retrieve a two bytes value in Little Endian format representing the heat-sink temperature of the device in a linear format ($Temp_3 = Y * 2^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word.	Y	Read Only	2-bytes
90h	Read_Fan_Speed_1	Used to retrieve a two bytes value in Little Endian format representing the fan_1 speed of the device in a linear format ($Fan_Speed_1 = Y * 25^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word.	Y	Read Only	2-bytes

96h	Read_POUT	Used to retrieve a two bytes value in Little Endian format representing the active output power of the device in a linear format ($POUT = Y \cdot 2^n$), where n is the exponent in two's compliment format, represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word	Y	Read Only	2-bytes
97h	Read_PIN	Used to retrieve a two bytes value in Little Endian format representing the active input power of the device in a linear format ($PIN = Y \cdot 2^n$), where n is the exponent in two's compliment represented by the five most significant bits of the upper byte. Y is the mantissa represented by the eleven lower bits of the two byte word	Y	Read Only	2-bytes
98h	PMBUS™ - Revision	Used to set and retrieve the version of the PMBUS™ specification, with which the PSU is in compliance	Y	Read Only	1-byte
9Ah	MFR_Model	Used to set and retrieve the manufacturer's model number assign to the device	Y	Read/Write	Variable plus 1-byte count
9Bh	MFR_Revision	Used to retrieve a two bytes value in Little Endian format representing the active input current of the device in a linear format ($IIN = Y \cdot 2^n$), where n is the exponent in two's compliment represented by the five most significant bits of the upper byte. Y is the mantissa represented the eleven lower bits of the two byte word	Y	Read/Write	1-byte
9Ch	MFR_location	Used to set and retrieve the location of manufacturing of the device	Y	Read/Write	Variable plus 1-byte count
9Dh	MFR_Date	Used to set and retrieve the date of manufacturing of the device.	Y	Read/Write	4-bytes plus 1 byte count
9Eh	MFR_Serial	Used to set and retrieve the value of the manufacturer's serial number assigned to the device.	Y	Read/Write	Variable plus 1-byte count
A0h	MFR_VIN_MIN	Used to retrieve the value of the minimum rated input voltage, that the PSU can be operated. Also, utilizes the Little Endian format where the two's compliment exponent is ($VIN_MIN = Y \cdot 2^1$).	Y	Read Only	2-bytes
A1h	MFR_VIN_MAX	Used to retrieve the value of the maximum rated input voltage, that the PSU can be operated safely. Also, utilizes the Little Endian format where the two's compliment exponent is ($VIN_MAX = Y \cdot 2^1$).	Y	Read Only	2-bytes
A2h	MFR_IIN_MAX	Used to retrieve the value of the maximum rated input current in Amps, that the PSU can be operated. Also, utilizes the Little Endian format where the two's compliment exponent is ($IIN_MAX = Y \cdot 2^6$).	Y	Read Only	2-bytes
A3h	MFR_PIN_MAX	Used to retrieve the value of the maximum rated output power in Watts, that the PSU can be operated. Also, utilizes the Little Endian format where the two's compliment exponent is ($PIN_MAX = Y \cdot 2^1$).	Y	Read Only	2-bytes
A4h	MFR_VOUT_MIN	Used to retrieve the value of the minimum rated output voltage that the PSU can provide. Also utilizes the Little Endian format where the two's compliment exponent is ($VOUT_MIN = Y \cdot 2^{-9}$).	Y	Read Only	2-bytes
A5h	MFR_VOUT_MAX	Used to retrieve the value of the maximum rated output voltage that the PSU can provide.	Y	Read Only	2-bytes
A6h	MFR_IOUT_MAX	Used to retrieve the value of the maximum rated output current in Amps, that the PSU is expected to provide.	Y	Read Only	2-bytes


A7h	MFR_POUT_MAX	Used to retrieve the value of the maximum rated output power in Watts, that the PSU is expected provide.	Y	Read Only	2-bytes
A8h	MFR_TAMBIENT_MAX	Used to retrieve the value of the maximum ambient temperature that the PSU can be operated, in degree Celsius.	Y	Read Only	2-bytes
A9h	MFR_TAMBIENT_MIN	Used to retrieve the value of the minimum ambient temperature that the PSU can be operated, in degree Celsius.	Y	Read Only	2-bytes

PMBUS™ MONITORING						
Parameter	Description/ Condition	Min	Nom	Max	Units	
$V_{i\ mon}$	Input RMS Voltage	$V_{i\ min} \leq V_i \leq V_{i\ max}$	-3.5		3.5	%
$I_{i\ mon}$	Input RMS Current		-2		2	%
$P_{i\ mon}$	Input Power		-4		4	%
$V_{1\ mon}$	V1 Voltage		-0.5		0.5	%
$I_{1\ nom}$	V1 Current		-2		-2	%
$P_{o\ mon}$	Total Output Power		-1.5		-1.5	%
$V_{SB\ mon}$	Standby Voltage		-1		2	%
$I_{SB\ mon}$	Standby Current		-2		15	%
t_1	Temperature1	Intake	-2		2	°C
t_2	Temperature2	Exhaust	-2		2	°C
t_3	Temperature3	Primary Section	-2		2	°C
t_4	Temperature4	Secondary Section	-2		2	°C
FS	Fan Speed	Measurement Accuracy	-5		5	%
	Fan Speed	Control Range (0-23000RPM)	0		100	%

TEMPERATURE AND FAN CONTROL	
Fan Speed	RPM
Nominal Fan Speed (Fan will start to speed up when the internal power supply module temperature exceeds 50°C)	8000 RPM
Maximum Fan Speed (Fan will reach its maximum speed of 23000 RPM when the internal power supply module temperature reaches 80°C.)	23000 RPM
Minimum Warning Fan Speed	2500 RPM

9.1 FAN AIRFLOW

To achieve the best cooling results, sufficient airflow through the supply must be maintained. Do not block or obstruct the airflow on either side of the power supply.

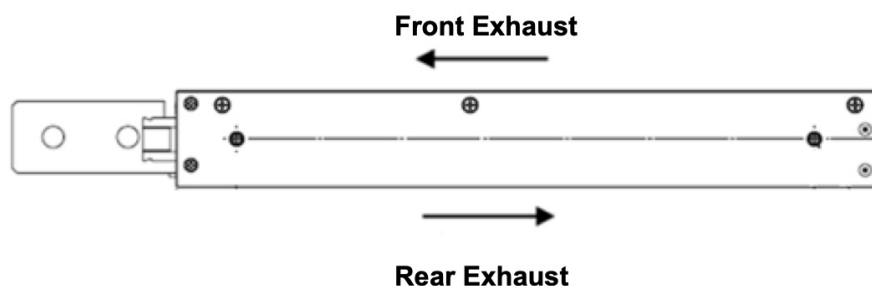

Normal (Front Exhaust) and reverse (Rear Exhaust) airflow options are available. See ordering Information for details.

10 CONNECTION


10.1 CONNECTORS

Input Connector: CNT1

Signal Connector: CNT2

Main Output Connector: Bus Bar (+)(-)

(Optional) Output Shunt FET Module: P6

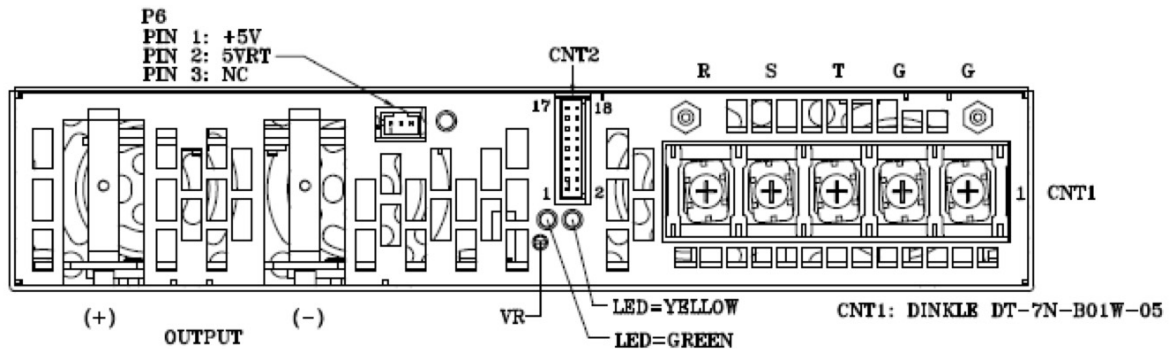

PINS	PIN TYPE	ASSIGNMENT	DESCRIPTION/ FUNCTION
Output			
BusBar(+)	Power	VO1_PWR	These are the +VO1 voltage output pins.
BusBar(-)	Power	VO1_RTN	These are the -VO1 return output pins.
Control			
CNT2-1	Signal	VO1S(+)	(+) Sense - If remote sense is required this pin must be connected to the +VO1 load on the system backplane. This pin can be left open if remote sense is not required.
CNT2-2	Signal	VO1S(-)	(-) Sense - If remote sense is required this pin must be connected to the VO1 return on the system backplane. This pin can be left open if remote sense is not required.
CNT2-3 CNT2-4	Signal	VCS	Current Share - This pin must be connected to the 8V current share of the redundant power supplies on the system backplane. This pin can be left open if current share is not required.
CNT2-7	Signal House Keeping	12VSB	12V Stand by - This is the 12V standby output voltage pin.
CNT2-9	Signal	Series_CS	For Series Connection Current Monitoring- When Signal pin is interconnected with other supply in series .In case of a power supply failing, this pin will turn off other power supply in series if load exceeds 10% max current.
CNT2-8	Signal	PS_ON (Optional)	Power Supply On - This is the power supply module control pin. This pin must be directly connected to common or controlled by a transistor connected to common on the system backplane.
CNT2-17	Signal	COM	Common - This is the common return pin for the power supply module.
CNT2-12	Signal Open Collector	DC_OK	DC Okay - This pin is used to monitor the output voltage. The signal on this pin will go high 100 to 150mSecs after the output voltage has reached regulation (above 95%). This signal will go low when the output voltage drops out of regulation (below 90%). This pin must be connected to an external voltage via pull up resistor on the system backplane 20V max 10mA max.
CNT2-10	Signal Open Collector	ALERT	Fault/Warning - An open collector signal is provided to indicate any fault or warning such as over temperature, overvoltage, over current, undervoltage, and fan fault.
CNT2-14	Signal Open Collector	AC_OK	AC Okay - This pin is used to monitor the AC input voltage. The signal on this pin will go high when the AC input voltage is above 178VAC. When the AC input voltage drops below 174VAC this signal will go low a minimum of 10mSec before the output voltage drops out of regulation. This pin must be connected to an external voltage via pull up resistor on the system backplane 20V max 10mA max.

CNT2-16	Signal	SDA_1	Communication Data pin.
CNT2-18	Signal	SCL_1	Communication Clock pin.
CNT2-11	Signal	A0	Address Pin-This pin operates at 3.3V internal pulled up by a 100k Ω resistor.
CNT2-13	Signal	A1	Address Pin-This pin operates at 3.3V internal pulled up by a 100k Ω resistor.
CNT2-15	Signal	A2	Address Pin-This pin operates at 3.3V internal pulled up by a 100k Ω resistor.


10.2 INPUT CONFIGURATIONS

10.2.1 SINGLE PHASE CONNECTION

Input Connector CNT1(180-528VAC, 47-63Hz)


For single phase, connect the AC source in one of the 3 different configurations.

1. R to S
2. S to T
3. R to T




10.2.2 3 PHASE DELTA CONNECTION

Input Connector CNT1(180-528VAC, 47-63Hz)

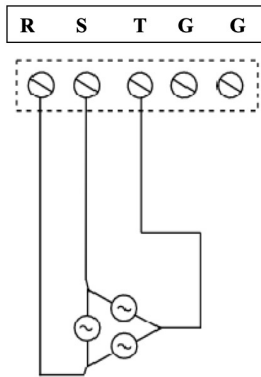

10.2.3 3 PHASE Y CONNECTION


Input Connector CNT1(180-528VAC, 47-63Hz)

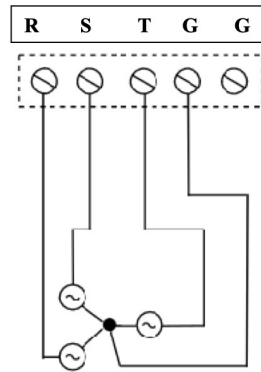

(OPTIONAL) OUTPUT SHUNT FET MODULE: P6


5V external supply is required to power FET module, which is used to shunt main output in case of a failure or lost of AC Power.

PIN	PIN TYPE	DESCRIPTION/ FUNCTION
Pin 1	Power	+5V
Pin 2	Power	5VRT
Pin 3	NC	No Connection




10.3 PARALLEL WIRING DIAGRAM

Dash lines show remote sense connections.

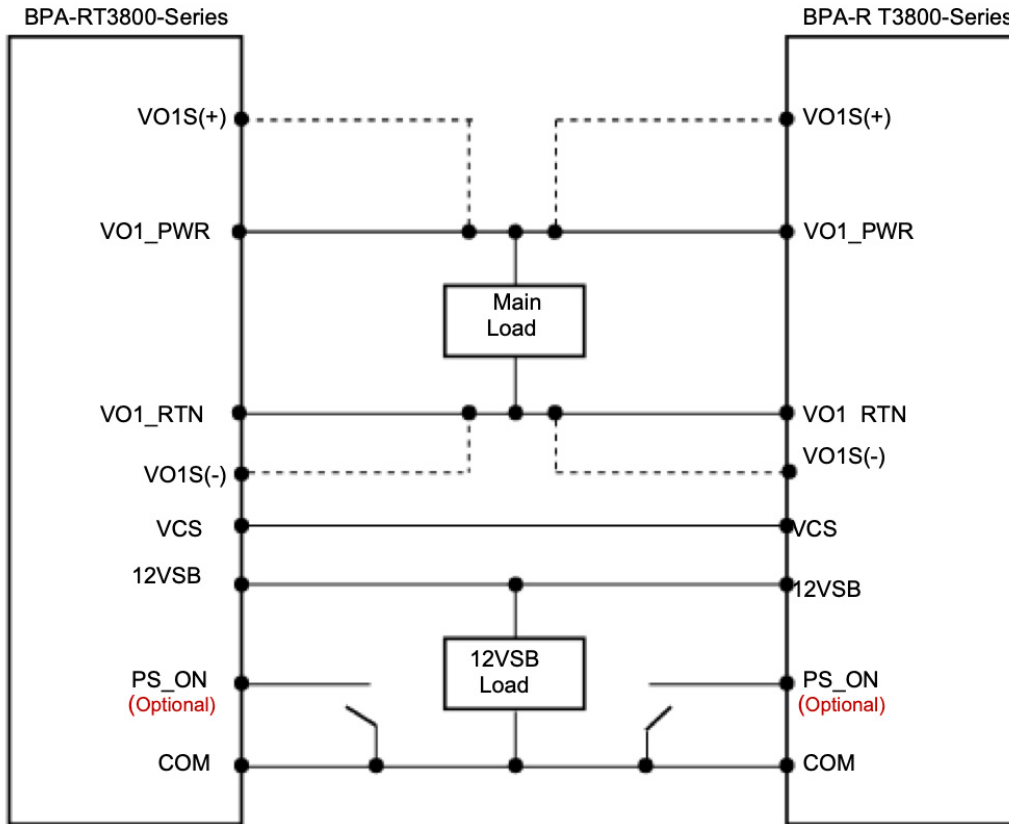

10.4 SERIES WIRING DIAGRAM

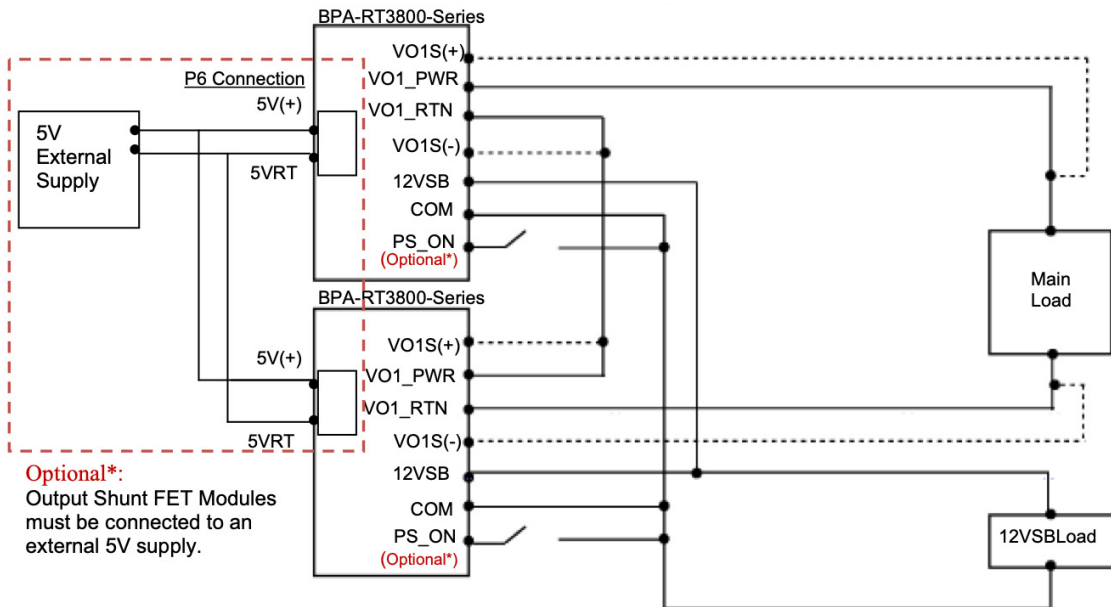

Optional*:
Output Shunt FET Modules must be connected to an external 5V supply.


When operating in series the current share pin must be left open.

*See Ordering Information on last page.

MECHANICAL

Parameter	Description/ Condition	Nom	Units
	Width	203.2(8)	
Dimension	Height	40.2(1.58)	mm(in)
	Depth	292.1(11.5)	
Weight		0.7(1.5)	Kg(lbs)

TECHNICAL DRAWING

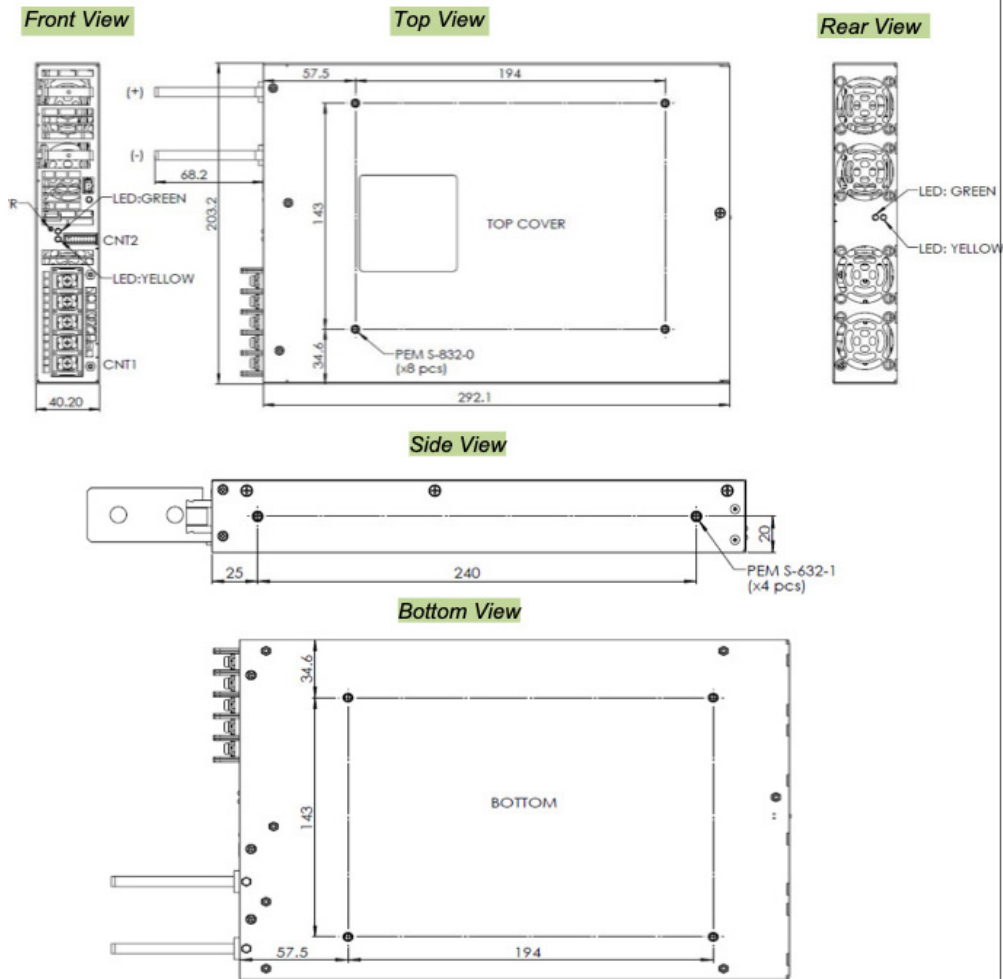

MODEL NO. / OUTPUT VOLTAGE / CURRENT RATINGS CHART

MODEL #	O/P VOLTAGE (VDC)	MINIMUM	MAXIMUM	VOUT ADJUST.
BPA-RT3800-080	8V	0A	313A	4-8.8VDC
	12VSB	0A	2.0A	-
BPA-RT3800-140	14V	0A	271A	8-14.6VDC
	12VSB	0A	2.0A	-
BPA-RT3800-480	48V	0A	79A	36-58VDC
	12VSB	0A	2.0A	-
BPA-RT3800-1100	110V	0A	34.5A	90-140VDC
	12VSB	0A	2.0A	-
BPA-RT3800-3200	320V	0A	11.8A	300-340VDC
	12VSB	0A	2.0A	-
BPA-RT3800-3800	400V	0A	10A	340-400VDC
	12VSB	0A	2.0A	-

INNOVATIVE SPECIALTY DC POWER SYSTEMS

Standard and Custom Power Supplies from 5W to 10KW

TRAFFIC CONTROL POWER SUPPLIES



- 70-400+ Watts / 120 and 220 VAC Models Available
- CALTRANS TEES, NYSDOT, CDOT, GDOT Compliant for 332, 334, 336, 342, 344, and 346 Series cabinets
- RoHS and NEMA Compliant
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

CUSTOM POWER DISTRIBUTION ASSEMBLIES (PDAs)



- Compliant with TEES 2020
- 1U smaller than the PDA2-LX and PDA3-LX
- User accessible slots as specified
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

COMPACT PCI



- AC or DC input, 175W - 500W DC output, active PFC
- 3U x 8HP, 6U x 8HP sizes
- PICMG 2.11 compliant, UL/CSA, NEMKO/TUV/CE certified, ROHS compliant
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Industrial Computing, Military, Satellite Comm, Test, Transportation, Telecom, Aerospace

SPECIALTY HOT-SWAPPABLE POWER SUPPLIES



- 200-1500W, Universal Input, 5-54VDC Output
- Hot Swap. N+1, 90+% Efficiency
- 1U Form Factors
- 30+ Variations for Various Applications Including Nuclear
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

RACK POWER SYSTEMS



- 200W-1500W, 2-8 slots, single or mixed output voltages, up to 10KW total
- Single, dual, or individual unit AC or DC input
- Internally or externally redundant DC outputs
- Standard 19" and 23" size or user-specified configurations also available
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

CUSTOMS & MODIFIED STANDARDS



- 75W-2KW
- Single to 7 outputs
- Designed and built to custom or semi-custom specifications
- Ruggedization against shock/ vibration/ humidity optional
- Custom electrical specs, chassis, paint, labeling, connectors, interface all available

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

LOW NOISE CONVECTION / CONDUCTION COOLED POWER SUPPLIES



- 200W-500W, 90—264VAC full range input with 12-54 VDC Output
- Wide operating temperature range / high efficiency
- Small form factors
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, IT, Sensitive Electronics

MEDICAL ADAPTERS



- 6W-250W, Efficiency levels V & VI
- Desktop, Wall-mount, and Interchangeable AC plug types
- Large selection of output connectors – additional cable lengths available
- UL60601 (medical) approved adapters available
- Ruggedization against shock/ vibration/ humidity optional

