



FEATURES

- Standard PCI Output Voltages:
 5.0V, 3.3V, ±12.0V, with Variable Currents
- Hot Swap, N+1 Redundant with Internal OR-ing Diodes
- .99 Power Factor Corrected AC 90-264V Input
- Current Sharing on 5.0V, 3.3V and +12.0V Outputs
- Standard 47 Pin Connector Configurations
- Custom Configurations To Meet User Specified Requirements
- Excellent Performance, Competitively Priced
- 2 Year Warranty
- Complies With All Requirements Of PICMG Power Interface Specifications
- Fully Compliant with the EU RoHS Directive**



1580 No. Kellogg Dr. Anaheim, California, 92807

(714) 917-0749

www.jasperelectronics.com sales@jasperelectronics.com

CompactPCI®Series

300 Watt - 3U 8HP Power Supplies

(PICMG® COMPLIANT)



COMPACTPCI® SERIES FRONT VIEW

GENERAL OVERVIEW

Jasper's Compact PCI Power Supplies comply with the industry standard PICMG requirements and are available in AC or DC input, from 175W to 500W DC output.

FEATURES ON SELECT MODELS INCLUDE:

- AC/DC: 90-264VAC Input 175, 200, 250, 300, 350, & 500 Watt Models 3U & 6U x 8HP
- DC/DC: 18-72VDC Input 175, 200, 250, 300, 350, & 500 Watt Models 3U & 6U x 8HP
- PICMG 2.11 Compliant
- Active PFC
- UL/CSA, NEMKO/TUV & CE Certified
- RoHS Compliant
- Current Sharing on 3.3, 5 & +12V Rails
- Hot Swap & ORing Diodes N+1 Operation
- Standard 47 Pin Output Connector with 38 & 32 Pin Options (Some Models)
- Models can be ruggedized against high shock, vibration, and humidity to meet MIL-STD-810 requirements
- Customizing To Meet Your System Requirements Is Our Specialty











TECHNICAL SPECIFICATIONS

Voltage/Current AC 90 264V, 4.3A max, 47 63Hz, 1 Phase	TECHNICAL SPECIFICATIONS	<u></u>			
Internal line fuse provided, non-user serviceable, A.C. 6.3A, 250V Power Factor Meets Harmonic Correction per IEC 1000-32. 0.88-0.99 line PFC typical at AC 115V, full load	INPUT				
Power Factor Meets Harmonic Correction per IEC 1000-3-2. 0.98 0.99 line PFC typical at AC 115V, full load inrush Current Transient Protection Thermistor soft start. ~250C AC cold start current 15Apk @ AC 115W, 30Apk @ AC 230V Transient Protection MOV. Withstands transients as specified by IEEE (62.41 3kV (differential and common mode) EMI Filtering Meets FCC Class B, and EN 55022 Level B (conducted) EMICH COLOR (Control of Control	Voltage/ Current	AC 90-264V, 4.3A max, 47	-63Hz, 1 Phase		
Transier Protection	Fusing	Internal line fuse provided, non-user serviceable. AC- 6.3A, 250V			
Transient Protection MOV. Withstands transients as specified by IEEE C62.41 3RV (differential and common mode) EMI Filtering Meets FCC Class 8, and EN 55022 Level B (conducted) Redundant/ Hot Swap Full power N+1 redundant, hot swap capable Touch Current O.5mA e230V Voltage/Current (V/A) V1 V2 V3 V4 Model PC1304-1022-4 S.0/40 3.3/40 4-12/10 -12/2.0 Combined output of V1+V2 not to exceed 50A. Total loading on all outputs of to Eveced 50A. Total loading on all outputs on to exceed 300W Line Regulation At the sense point over full input range, ±0.05% typical, sense leads connected Load Regulation 1.0% typical for V1.V2; ±2.0% for V3; ±5.0% for V5 Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None required in single unit applications, 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Temperature Coefficient Output offirt < <0.20% after 20 minute warm-up Pamalie AN Selvation with a 25% load change at 1A/usec. Output returns to within 1% in less than 500, yec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1µF/22µF capacitors at the output terminals Current Sharing/ V1, V2, V3 outputs. Single wire connection for 10% current sharing between any number of units. Droop method current sharing between any number of units. Droop method current sharing for the output terminals of the connection of 10 per vice method sharing between any number of units. Droop method current sharing for the output terminals of the current sharing between any number of units. Droop method current sharing for the output terminals of the current sharing between any number of units. Droop method current sharing for the output terminals of the current sharing between any number of units. Droop method current sharing for the output terminals of the current sharing betwe	Power Factor	Meets Harmonic Correction per IEC 1000-3-2. 0.98-0.99 line PFC typical at AC 115V, full load			
EMicring Meets FCC Class B, and EN 55022 Level B (conducted) Efficiency 75-83% typical at AC 115V, full load Redundant/ Hot Swap Full power N+1 redundant, hot swap capable Touch Current OUTPUT Voltage/Current (V/A) Meets IEC60950 regulations OUTPUT Voltage/Current (V/A) Nodel PCi304-1022-4 5.0/40 Combined output of V1-1-V2 not to exceed 50A. Total loading on all outputs not to exceed 50A. Total loading on all outputs not to exceed 50A. Total loading on all outputs not to exceed 50A. Total loading on all outputs not to exceed 50A. Total loading on all outputs not to exceed 50A. Total loading on all outputs not to exceed 30A. Total loading on all outputs not to exceed 30A. Elemente Sense 1,1/96 typical for V1, V2, ±2.096 for V3, ±5.096 for V5. Remote Sense 1,1/96 typical for V1, V2, ±2.096 for V3, ±5.096 for V5. Remote Sense 1,1/92 V3 outputs compensate for up to 2.59V total line drop in the load cables. Outputs are internally sensed if loads are opened Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Stability Output drift <=0.2% after 20 minute warm-up Temperature Coefficient <10.02%/mC,0 - 5.0mC, after 20 minute warm-up Dynamic Response Less than 398 devalution with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 5.0mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20Mitz bandwidth with a coaxial probe and 0.1 µf/22µf capactors at the output terminals Current Sharing/ V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Darallel N+1 Operation Over Current/ Short Circuit Protection Internal temperature sensing, Causes all outputs to shut down. Automatic recovery when overload is removed. Over Temperature Protection Internal temperature sensing, Causes all outputs to shut down. Automatic recovery when overload is removed. Over Temperature Pro	Inrush Current				
Efficiency 78-83% typical at AC 115V, full load Redundant/ Hot Swap Full power N+1 redundant, hot swap capable Touch Current C.0.5mA @230V Dielectric Withstand Meets IEC60950 regulations Water New York Water New Y	Transient Protection	MOV. Withstands transien	ts as specified by IEEE C62	.41 3KV (differential and c	common mode)
Full power N+1 redundant, hot swap capable	EMI Filtering	Meets FCC Class B, and EN	l 55022 Level B (conducted	1)	
Touch Current Combined Meets EC60950 regulations	Efficiency	78-83% typical at AC 115\	/, full load		
Dielectric Withstand Meets IEC60950 regulations OUTPUT Voltage/Current (V/A) V1 V2 V3 V4 Model PCI304-1022-4 5.0/40 3.3/40 +12/10 -12/2.0 Combined output of V1+V2 not to exceed 50A. Total loading on all outputs not to exceed 300W Line Regulation At the sense point over full input range, ±0.05% typical, sense leads connected Load Regulation ±1.0% typical for V1, V2; ±2.0% for V3; ±5.0% for V5 Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None at turn-on or turn-off Stability Output drift ±0.2% after 20 minute warm-up Temperature Coefficient <±0.02%/C,0° -50°C, after 20 minute warm-up Temperature Coefficient <±0.02%/C,0° -50°C, after 20 minute warm-up Temperature Coefficient <±0.02%/C,0° -50°C, after 20 minute warm-up Femperature Coefficient	Redundant/ Hot Swap	Full power N+1 redundan	t, hot swap capable		
OUTPUT Voltage/current (V/A) V1 V2 V3 V4 Model PCI304-1022-4 5.0/40 3.3/40 +12/10 −12/2.0 Combined output of V1+V2 not to exceed 50A. Total loading on all outputs not to exceed 300W Line Regulation At the sense point over full input range, ±0.05% typical, sense leads connected Load Regulation ±1.0% typical for V1, V2, ±2.0% for V3, ±5.0% for V5 Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Stability Output drift <±0.2% after 20 minute warm-up Temperature Coefficient <±0.02%/C0, 0°-50°C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1 µF/22µ° capacitors at the output terminals Current Sharing/ V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4	Touch Current	<0.5mA @230V			
V1	Dielectric Withstand	Meets IEC60950 regulatio	ns		
Solidar Soli	OUTPUT				
Combined output of V1+V2 not to exceed 50A. Total loading on all outputs not to exceed 300W. Line Regulation At the sense point over full input range, ±0.05% typical, sense leads connected ±1.0% typical for V1, V2; ±2.0% for V3; ±5.0% for V5 Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Stability Output drift <±0.2% after 20 minute warm-up Temperature Coefficient <\$\times0.2\% \times C, 00 = 50\cdot C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1\pt/22\pt capacitors at the output treminals Current Sharing/ Parallel N+1 Operation Current Sharing/ Porop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Protection Internal very proventio	Voltage/Current (V/A)	V1	V2	V3	V4
Total loading on all outputs not to exceed 300W Line Regulation	Model PCI304-1022-4	5.0/40	3.3/40	+12/10	-12/2.0
Load Regulation ±1.0% typical for V1, V2; ±2.0% for V3; ±5.0% for V5 Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Stability Output drift <±0.2% after 20 minute warm-up Temperature Coefficient <±0.02%/∞c, 0° - 50°c, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1µF/22µF capacitors at the output terminals Current Sharing/ Y1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Parallel N+1 Operation Proop method current share for V4 Hold-Up Time Outputs remain in regulation >18 msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning <th></th> <th></th> <th></th> <th></th> <th></th>					
Remote Sense V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are internally sensed if leads are opened Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation Over/ Under Shoot None at turn-on or turn-off Stability Output drift < ±0.2% after 20 minute warm-up Temperature Coefficient < ±0.02% (~0° - 50°C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1 µf/22µf capacitors at the output terminals Current Sharing/ Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation > 18 msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over V	Line Regulation				ed
Minimum Loading None required in single unit applications. 3.0A minimum required on V1 for parallel operation	Load Regulation				
Over/ Under Shoot None at turn-on or turn-off Stability Output drift < ±0.2% after 20 minute warm-up Temperature Coefficient <±0.02%/°C, 0° - 50°C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1µF/22µF capacitors at the output terminals Current Sharing/ Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation > 18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic	Remote Sense	V1, V2, V3 outputs compensate for up to 0.25V total line drop in the load cables. Outputs are			
Stability Output drift <±0.2% after 20 minute warm-up Temperature Coefficient <±0.02%/°C, 0° - 50°C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1µF/22µF capacitors at the output terminals Current Sharing/Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 0.	Minimum Loading				
Temperature Coefficient <±0.02%/°C, 0°-50°C, after 20 minute warm-up Dynamic Response Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than 500µsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1µF/22µF capacitors at the output terminals Current Sharing/Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of inp	Over/ Under Shoot	None at turn-on or turn-o	·ff		
Dynamic Response Less than 3% deviation with a 25% load change at 1A/μsec. Output returns to within 1% in less than 500μsec. Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1μF/22μF capacitors at the output terminals Current Sharing/Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch offi. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0. Disabled by closed circuit or	Stability	Output drift <±0.2% after	20 minute warm-up		
Ripple and Noise (PARD) For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz bandwidth with a coaxial probe and 0.1 µF/22µF capacitors at the output terminals Current Sharing/ Parallel N+1 Operation Proop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Remote Enable Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL or Disabled b	Temperature Coefficient	<±0.02%/°C, 0° - 50°C, aft	er 20 minute warm-up		
bandwidth with a coaxial probe and 0.1μF/22μF capacitors at the output terminals Current Sharing/Parallel N+1 Operation V1, V2, V3 outputs. Single wire connection for ±10% current sharing between any number of units. Droop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0. Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs within regulation. Off or Amber indicates input and/or output power fault	Dynamic Response	Less than 3% deviation with a 25% load change at 1A/µsec. Output returns to within 1% in less than			
Parallel N+1 Operation Droop method current share for V4 Hold-Up Time Outputs remain in regulation >18msec minimum following loss of AC power at low line, full load Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1 Remote Inhibit Enabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Ripple and Noise (PARD)	For all outputs, 50mV max or 1% peak-to-peak nominal, which ever is greater, DC to 20MHz			
Over Current/ Short Circuit Protection Current limit on all outputs, 105-130% max load typical. Automatic recovery when overload is removed Over Temperature Protection Internal temperature sensing. Causes all outputs to shut down. Automatic recovery Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0.	_	V1, V2, V3 outputs. Single wire connection for $\pm 10\%$ current sharing between any number of units.			
Over Temperature ProtectionInternal temperature sensing. Causes all outputs to shut down. Automatic recoveryUnder Voltage WarningAny output dropping below 10% of nominal triggers the power fail warning signalOver Voltage ProtectionNon-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to resetSIGNALS, INDICATORS AND CONTROLSEnabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1Remote InhibitEnabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0Power Fail WarningLoss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputsLED IndicatorDual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Hold-Up Time	Outputs remain in regula	tion >18msec minimum fo	llowing loss of AC power	at low line, full load
Under Voltage Warning Any output dropping below 10% of nominal triggers the power fail warning signal Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1 Remote Inhibit Enabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Over Current/ Short Circuit Protection	I	ts, 105-130% max load typ	ical. Automatic recovery	when overload is
Over Voltage Protection Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to latch off. Remote inhibit, enable or input recycle required to reset SIGNALS, INDICATORS AND CONTROLS Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1 Remote Inhibit Enabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Over Temperature Protection	Internal temperature sens	sing. Causes all outputs to	shut down. Automatic re	covery
SIGNALS, INDICATORS AND CONTROLS Remote Enable Enabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1 Enabled by open circuit or TTL logic 1. Disabled by open circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Under Voltage Warning				signal
Remote EnableEnabled by closed circuit or TTL logic 0. Disabled by open circuit or TTL logic 1Remote InhibitEnabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0Power Fail WarningLoss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputsLED IndicatorDual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Over Voltage Protection	Non-crowbar type. Any output that exceeds 25% ±10% of nominal Vout will cause all outputs to			
Disabled by open circuit or TTL logic 1 Enabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	SIGNALS, INDICATORS AND CONT	ROLS			
Remote Inhibit Enabled by open circuit or TTL logic 1. Disabled by closed circuit or TTL logic 0 Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Remote Enable	Enabled by closed circuit or TTL logic 0.			
Power Fail Warning Loss of input AC causes a TTL compatible signal to go low >4msec prior to V1 or V2 output dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal triggered by an under voltage condition on V1 or V2 outputs LED Indicator Dual LEDs. Green indicates input power ON and outputs within regulation. Off or Amber indicates input and/or output power fault	Remote Inhibit	Enabled by open circuit or TTL logic 1.			
input and/or output power fault	Power Fail Warning	dropping out of regulation. At AC turn-on, signal stays low until outputs are in regulation. PF signal			
	LED Indicator				

 ${\it *Specifications subject to change without notice}.$





MECHANICAL			
Outline	3U x 8HP x 160mm Eurocard. Refer to JE Outline Dwg 02102-000 or the Mechanical Outline in this catalog. Complies with all current PICMG® CompactPCI specifications		
Power Density	7.7 Watts/Cubic Inch		
Weight	Approx: 1.47 lbs / 666.0 gs.		
Retaining Latches	Supplied with a single Rittal #3686.135 Type VII (Telecom) Lower Latch. Other manufacturers and types available. Consult factory		
Guide Rails	Supplied with .260[6.61] offset guide rails for use with Rittal 3687.832 (or equivalent) PSU guides		
Front Panel Overlay	Supplied with Lexan overlay and JE Logo. May be deleted, or supplied with customer specified logo or other information. Consult factory		
OPERATING ENVIRONMEN	Т		
Operating Temperature	0° – 50°C ambient at full load, with specified airflow		
Cooling	A minimum of 60cfm (800 lfm) direct forward airflow required to achieve full rated power and specified MTBF. Consult factory for derating guidelines with reduced or reversed airflow		
Relative Humidity	Up to 90% RH, non-condensing		
Operational Vibration	2.0G peak, 5 – 500Hz along three orthogonal axis		
Storage Temperature	-40° to 85°C		
Altitude	Operating to 10,000 ft; Storage to 30,000 ft.		
MTBF	Designed for 150,000 hrs at 25℃		
INTERCONNECT			
I/O Connectors. Request JE Outli pin function identification	ine Configuration Drawing #02102-000 or refer to the chart in this catalog for		
47 Circuit	Positronic Ind. P/N PCIH47M400A1. Mates with PI P/N PCIH47F300A1		
Note: Use of the sp	pecified mating connector is required to insure proper "make/break" sequential contact sequence		
SAFETY			
Recognized to U.S. and Canadian TUV certified to EN60950 Ed. 1 (2	n Bi-National Standard UL 60950-1, 1st. Ed., 2007, and CSA C22.2 No. 60950-1-03, 2007 (cULus Mark); 2007). CE Marked		

 ${\it *Specifications subject to change without notice}.$

47 PIN DIN I/O CONNECTOR FUNCTIONS

PIN#	SEQ ⁽¹⁾	FUNCTION	
01-04	2	+5.0V	v1 Ouput
05-12	2	GND	V1+V2 Return
13-18	2	+3.3V	V2 Output
19	2	GND	V3 Return
20	2	+12.0V	V3 Output
21	2	-12.0V	V4 Output
22	2	RTN	Signal Return
23	2	N.C	No Connection (Reserved)
24	2	GND	V4 Return
25,26	2	N/C	No Connection (Reserved)
27	3	R/EN	Remote Enable. Closed Circuit to GND
28,29	2	N/C	No Connection (Reserved)
30	2	+S1	+5.0V (V1) Remote Sense
31,32	2	N/C	No Connection (Reserved)
33	2	+S2	+3.3V (V2) Remote Sense
34	2	S+RTN	Sense Return for V1, V2, V3





35	3	ISHR-1	+5.0V(V1) Current Share (Option C)		
36	2	+S3	+12.0V (V3) Remote Sense		
37	2	N/C	No Connection (Reserved)		
38	2	DEG	Thermal Degrade Signal		
39	2	R/INH	Remote Inhibit, Close circuit to GND		
40	2	N/C	No Connection (Reserved)		
41	3	ISHR-2	+3.3V (V3) Current Share (Option C)		
42	2	PF	Power Fail Signal		
43	2	N/C	No Connection (Reserved)		
44	3	ISHR-3	+12.0V (V3) Current Share (Option C)		
45	1	PF	Protective Earth (chassis) Ground		
46	2	Input Power	PCI: Neutral (N) ACC Power Input DPCI: +DC		
47	2	Input Power	PCI: Line (L) AC Power Input DPCI: -DC		
	*(1) Contact mating sequence. 1= First to make/ last to break				


CONFIGURATION OPTIONS

OPTION	CODE		
(1) Connector Type	4 = 47 pin (PICMG standard);		
(2) Latch Type	S = Standard Telecom Type VII; O = Optional Type IV; N = None provided		
(3) Overlay	S = Standard (JE Logo, model designation, etc); B = Blank (No logo, model designation, etc); N = No overlay provided; NN = No overlay; in addition, the front panel including the EMI strip is also deleted. For user provided panel or custom enclosure applications. Note: Removal of the panel does not violate safety enclosure requirements or integrity. Contact the factory for panel fastener type, max penetration depth and location information. *M = Custom overlay - User specified. May require a factory assigned custom model code. (*- Additional cost. Consult factory.)		
(4) Custom Configuration	M = Modified, followed by a factory assigned 4-digit number to identify a user specified configuration. Such models may include special or non-standard features and/or options, or be in a configuration differing sufficiently from the design of the approved similar standard model from which it is derived to require re-evaluation of all or part of the design to insure continuing compliance with all safety requirements. Option codes 2,3 may not be present in the model description as these requirements are generally included in the user specifi-cation documentation on file with the factory. Consult the factory for exact requirements. (May incur additional cost. Consult factory.)		
(5) RoHS Compliant	G = Jasper products that are fully compliant with the requirements of Directive 2015/863/EU Restrictions of Hazardous Substances (RoHS) are identified with the letter code "G" in the JE part number and model description on the unit labels and related documents (sales orders, etc). All materials, processes and packaging used in the assembly and shipping of this product comply.		
	Examples: PCl304-1022-4-SSG PCl304-1022-4-M4662 G		






BACKPLANE CONNECTOR LOCATIONS, VIEWED FROM THE FRONT OF THE ENCLOSURE

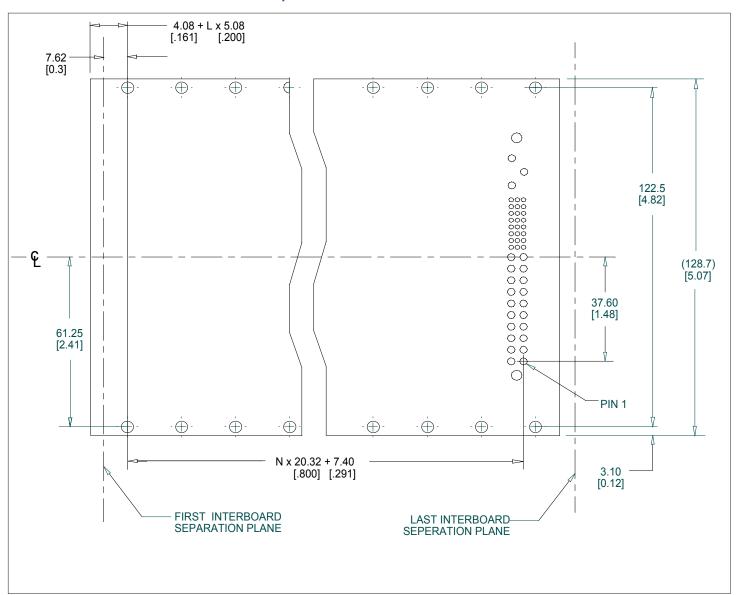



COMPACTPCI® OUTLINE DRAWING

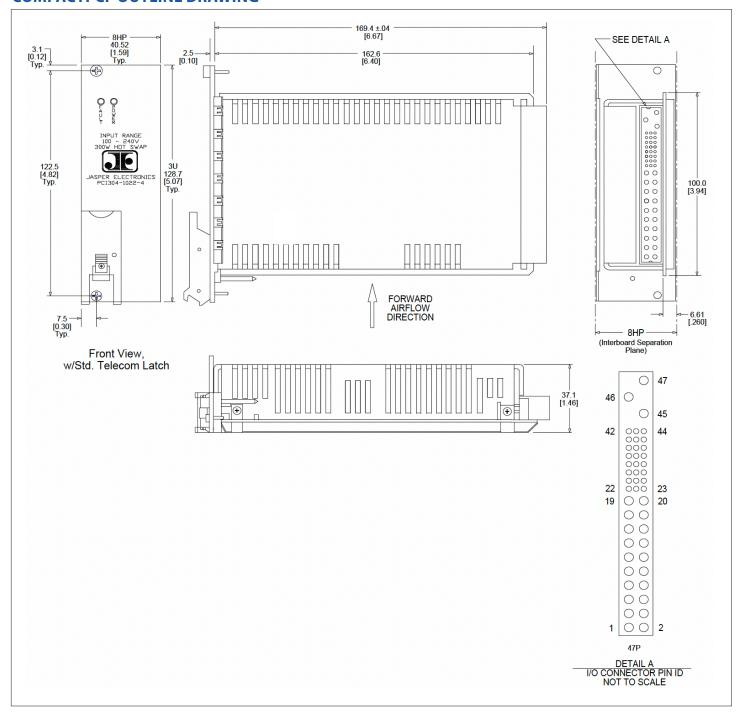

LIMITED WARRANTY POLICY

All Jasper Electronics (JE) standard model power supplies and products are guaranteed to be free of defects in workmanship and materials for a minimum of two (2) years from the date of original shipment, when operated within specification. Non-standard (custom) power supplies and products may be warranted on an individual basis. The unused portion of this warranty is fully transferable with the original equipment in which the power supply is installed. Please see our website for full warranty statement.





INNOVATIVE SPECIALTY DC POWER SYSTEMS

Standard and Custom Power Supplies from 5W to 10KW

TRAFFIC CONTROL POWER SUPPLIES



- 70W 250W / 120 and 220 VAC Models available
- California Department of Transportation (CALTRANS) TEES 2020 and NYSDOT compliant for 332L, 334L, and 336L cabinets.
- RoHS and NEMA compliant
- Custom labeling and barcoding available optionally

COMPACT PCI



- AC or DC input, 175W 500W DC output, active PFC
- 3U x 8HP, 6U x 8HP sizes
- PICMG 2.11 compliant, UL/CSA, NEMKO/TUV/CE certified, ROHS compliant

Primary Applications: Industrial computing, satellite communications, servers, aerospace etc.

NUCLEAR HOT-SWAPPABLE POWER SUPPLIES



- 200-1500W, Universal Input, 5-54VDC Output
- Hot Swap. N+1, 90+% Efficiency
- 1U Form Factors
- 30+ Variations for Various Applications

RACK POWER SYSTEMS



- 200W-1500W, 2-8 slots, single or mixed output voltages, up to 10KW total
- Single, dual, or individual unit AC or DC input
- Internally or externally redundant DC outputs
- Standard 19" and 23" size or user-specified configurations also available

CUSTOMS & MODIFIED STANDARDS



- 75W-2KW
- Single to 7 outputs
- Designed and built to custom or semi-custom specifications

CONVECTION COOLED POWER SUPPLIES



- 200W-500W, 90—264VAC full range input with 12-54 VDC Output
- $\bullet \ \ \text{Wide operating temperature range / high efficiency}\\$
- Small form factors

Primary Applications: IT, industrial, medical equipment, any system where low noise is a requirement

MEDICAL ADAPTERS



- 6W-250W, Efficiency levels V & VI
- Desktop, Wall-mount, and Interchangeable AC plug types
- Large selection of output connectors additional cable lengths available
- UL60601 (medical) approved adapters available

MEDICAL OPEN FRAME



- 40-350W
- Nemko, UL, and CSA Approved
- · Medical (BF) Safety Approved
- Class I and Class II Options





