

**JASPER
ELECTRONICS**

*Innovative Specialty
DC Power Systems*

Universal Input AC / DC Medical & ITE Application External Desktop Switching Adapter 50 Watts Green Power Single Output



GENERAL OVERVIEW

Jasper's External Power Supplies are available from 5W-150W, with single and multiple outputs. Fixed and detachable I/O cords are available, as are Standard and Custom configuration models. Please feel free to contact us for any further information about your application so we can offer a solution!

FEATURES INCLUDE:

- Accomodate Universal AC Input
- Meet Medical Standards IEC60601-1 & ITE Standards IEC60950-1
- EMI Meet EN 55011 & EN55022 / FCC Class B
- No Load Power Consumption < 0.16W
- Energy Efficiency Level VI
- CE Marking Compliance



CONTACT

1580 No. Kellogg Dr.
Anaheim, California, 92807

(714) 917-0749

www.jasperelectronics.com
sales@jasperelectronics.com



ISO9001:2015

Rev A-February-20-2023


ELECTRICAL SPECIFICATIONS	
All specifications are typical at nominal input, full load	
INPUT SPECIFICATIONS	
Input Voltage	90-264VAC
Input Connector	3 Pole AC inlet IEC320-C14(DT7)/ 2 Pole AC inlet IEC320-C8 (DT8)
Input Frequency	47-63Hz
Inrush Current	13.4A (72Apk) at 230VAC
Input Current	Typical 0.72A at 115VAC/ 0.43A at 230VAC
Dielectric Withstand	Meet IEC60601-1 & IEC60950-1
EMI	Meet EN55011 & EN55022 / FCC Class B.
Hold-Up Time	Typical 20mS at 115VAC Typical 8ImS at 230VAC
Earth Leakage Current (Class I)	Less than 0.18 mA
Enclosure Leakage Current (Class I)	Less than 0.01mA
No Load Power	Less than 0.16W at 230VAC
OUTPUT SPECIFICATIONS	
Output Voltage	See Ratings Chart
Output Current	See Ratings Chart
Output Wattage	Typical 35-50 Watts
Output Connector & Cord	Optional
Line Regulation	Typical 0.1%
Load Regulation	Typical $\pm 3\%$
Noise & Ripple	1.0% peak to peak
OVP	Built-in by latch circuit
Adjustability	Factory Set
Over Current Protection	Fully protected against output overload and short circuit. Consult the factory for OCP setting
GENERAL SPECIFICATIONS	
Efficiency	80-92%. (various with the output voltage)
Switching Frequency	65KHz
Circuit Topology	Fixed frequency Flyback circuit
Transient Response	Output voltage returns in less than 1mS following a 25% load change.
Safety Standard	Meet Medical IEC60601-1 & ITE IEC60950-1, Class I for DT7 (CI4), Class II for DT8 (CS)
Operating Temperature	-20°C to +40°C
Cooling	Free air convection
Storage Temperature	-40°C to +85°C
Construction	Impact resistant thermo-plastic enclosure case
Power Density	2.8-4 Watts. / Cubic inch.
Weight	270g (8.80Oz)

**Specifications subject to change without notice.*

1. All measurements are at nominal input, full load, and +25°C unless otherwise specified.
2. Load regulation is measured at 115Vac or 230Vac in percentage to indicate the change in output voltage as the load varied from half load to full load($\pm\%$).
3. The exact obtainable load regulation depends upon the output cord selected and load current.
4. AT050 can meet Energy Efficiency Level VI and CEC except 5V output.
5. Due to requests in market and advances in technology, specifications subject to change without notice.

MODEL CHART			
Model Number	AC Inlet	O/P Voltage	O/P Current
HEMGS6-I-7000	IEC320-CI4 (DT7)	5.0VDC	7.00A
HEMGS6-2-4200	IEC320-CI4 (DT7)	12.0VDC	4.20A
HEMGS6-5-2150	IEC320-CI4 (DT7)	24.0VDC	2.15A
HEMGS6-8-1100	IEC320-CI4 (DT7)	48.0VDC	1.10A

MECHANICAL DRAWING

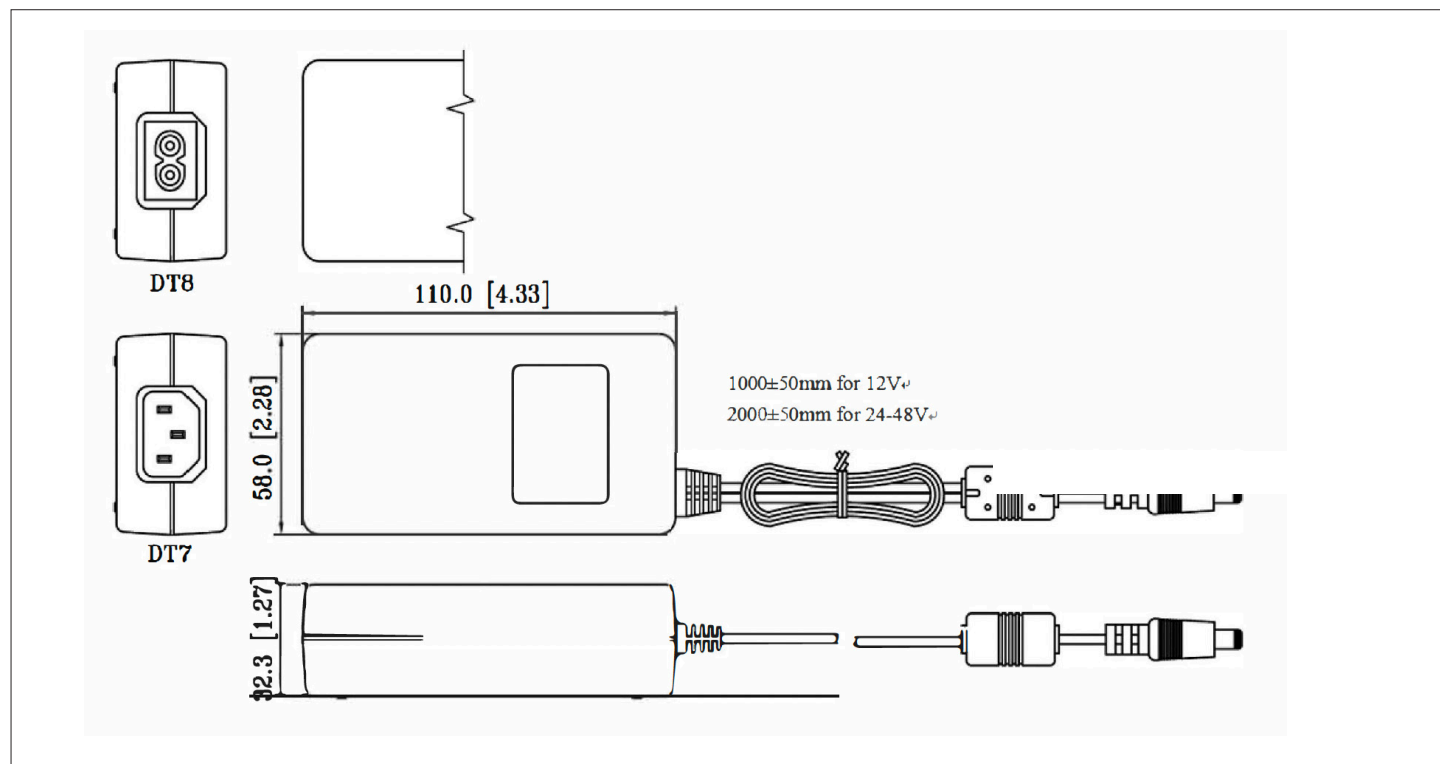

INNOVATIVE SPECIALTY DC POWER SYSTEMS

Standard and Custom Power Supplies from 5W to 10KW

TRAFFIC CONTROL POWER SUPPLIES



- 70-400+ Watts / 120 and 220 VAC Models Available
- CALTRANS TEES, NYSDOT, CDOT, GDOT Compliant for 332, 334, 336, 342, 344, and 346 Series cabinets
- RoHS and NEMA Compliant
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

CUSTOM POWER DISTRIBUTION ASSEMBLIES (PDAs)



- Compliant with TEES 2020
- 1U smaller than the PDA2-LX and PDA3-LX
- User accessible slots as specified
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

COMPACT PCI



- AC or DC input, 175W - 500W DC output, active PFC
- 3U x 8HP, 6U x 8HP sizes
- PICMG 2.11 compliant, UL/CSA, NEMKO/TUV/CE certified, ROHS compliant
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Industrial Computing, Military, Satellite Comm, Test, Transportation, Telecom, Aerospace

SPECIALTY HOT-SWAPPABLE POWER SUPPLIES



- 200-1500W, Universal Input, 5-54VDC Output
- Hot Swap, N+1, 90+% Efficiency
- 1U Form Factors
- 30+ Variations for Various Applications Including Nuclear
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

RACK POWER SYSTEMS



- 200W-1500W, 2-8 slots, single or mixed output voltages, up to 10KW total
- Single, dual, or individual unit AC or DC input
- Internally or externally redundant DC outputs
- Standard 19" and 23" size or user-specified configurations also available
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

CUSTOMS & MODIFIED STANDARDS



- 75W-2KW
- Single to 7 outputs
- Designed and built to custom or semi-custom specifications
- Ruggedization against shock/ vibration/ humidity optional
- Custom electrical specs, chassis, paint, labeling, connectors, interface all available

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

LOW NOISE CONVECTION / CONDUCTION COOLED POWER SUPPLIES



- 200W-500W, 90—264VAC full range input with 12-54 VDC Output
- Wide operating temperature range / high efficiency
- Small form factors
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, IT, Sensitive Electronics

MEDICAL ADAPTERS



- 6W-250W, Efficiency levels V & VI
- Desktop, Wall-mount, and Interchangeable AC plug types
- Large selection of output connectors – additional cable lengths available
- UL60601 (medical) approved adapters available
- Ruggedization against shock/ vibration/ humidity optional

