

**JASPER
ELECTRONICS**

*Innovative Specialty
DC Power Systems*



CONTACT

1580 No. Kellogg Dr.
Anaheim, California, 92807

(714) 917-0749

www.jasperelectronics.com
sales@jasperelectronics.com

MD72-22

Medical Desktop Type

25-72W Max



GENERAL OVERVIEW

Jasper's Medical Power Supplies are available from 4.5W-310W, with both fixed and detachable I/O cords options. Standard and Custom configuration Medical IEC Adapters are also available. Please see below for specifications and available options.

FEATURES INCLUDE:

- DoE Compliance
- RoHS Compliance
- Over Voltage Protective Installation
- Over Current Protective Installation
- Over Temperature Protective Installation
- Short Circuit Protective Installation
- LED Indication
- MTBF > 100,000 Hours

MD55 x Y-vv PP

x: Case Type: 1. C14 2. C8 3. C6 6. C18

Y: Output Range (see table below, select letters A-T)

vv: Specified Output Voltage, ie 24 is 24VDC

PP: Connector Type, ie 01 for Jasper standard DC cable or please refer to the appendix page



ISO9001:2015



Rev A-March-4-2023

MODEL CHART							
Model Number	Max Output Power (W)	Output Voltage (Vo)	Min Load (Io)	Max Load (Io)	Load Regulation	Line Regulation	Ripple & Noise
MD72-22-xA	25 W	5-9V	0A	5.0A	±5%	±3%	180mV
MD72-22-xB	40 W	12-16V	0A	3.33A	±5%	±3%	240mV
MD72-22-xC	40 W	18-24V	0A	2.10A	±5%	±3%	360mV
MD72-22-xD	40 W	32-42V	0A	1.25A	±5%	±3%	630mV
MD72-22-xE	40 W	44-56V	0A	0.90A	±5%	±3%	840mV
MD72-22-xF	30 W	5-9V	0A	6.0A	±5%	±3%	180mV
MD72-22-xG	50 W	12-16V	0A	4.16A	±5%	±3%	240mV
MD72-22-xH	50 W	18-24V	0A	2.63A	±5%	±3%	360mV
MD72-22-xJ	50 W	32-42V	0A	1.56A	±5%	±3%	630mV
MD72-22-xK	50 W	44-56V	0A	1.13A	±5%	±3%	840mV
MD72-22-xW	40 W	5-9V	0A	8.0A	±5%	±3%	180mV
MD72-22-xM	35 W	5-9V	0A	7.0A	±5%	±3%	180mV
MD72-22-xN	60 W	12-16V	0A	5.0A	±5%	±3%	240mV
MD72-22-xP	60 W	18-24V	0A	3.15A	±5%	±3%	360mV
MD72-22-xQ	60 W	32-42V	0A	1.87A	±5%	±3%	630mV
MD72-22-xR	60 W	44-56V	0A	1.36A	±5%	±3%	840mV
MD72-22-xY	65 W	12-16V	0A	5.42A	±5%	±3%	240mV
MD72-22-xS	45 W	5-9V	0A	9.0A	±5%	±3%	180mV
MD72-22-xU	72 W	12-16V	0A	6.0A	±5%	±3%	240mV
MD72-22-xV	72 W	18-24V	0A	3.78A	±5%	±3%	360mV
MD72-22-xL	72 W	32-42V	0A	2.25A	±5%	±3%	630mV
MD72-22-xT	72 W	44-56V	0A	1.63A	±5%	±3%	840mV


Note:

1. Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1 uf ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
2. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
3. Max. Output Power (W) $\geq V_o \times I_o$

INPUT SPECIFICATIONS	
Input Range	100-240VAC
Frequency	50-60Hz
Input Current	≤2.0A
Inrush Current	≤120A at Cold Start,
Efficiency	Meet CEC Level V, VI (DoE)
Hold-Up Time	≥8.3mS
Turn On Time	≤3S
OUTPUT SPECIFICATIONS	
Over Voltage Protection	Latch Off / Auto Recovery
Short Circuit Protection	Auto Recovery
Over Current Protection	Auto Recovery
Over Temperature Protection	Optional
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature	0 to 40°C
Storage Temperature	-20°C to 85°C
Storage Humidity	5% to 90%
SAFETY	
UL, cUL, UL60601, TUV / RH, EN / IEC 60601, CB, CE, FCC	

**Specifications subject to change without notice.*

MECHANICAL DRAWING

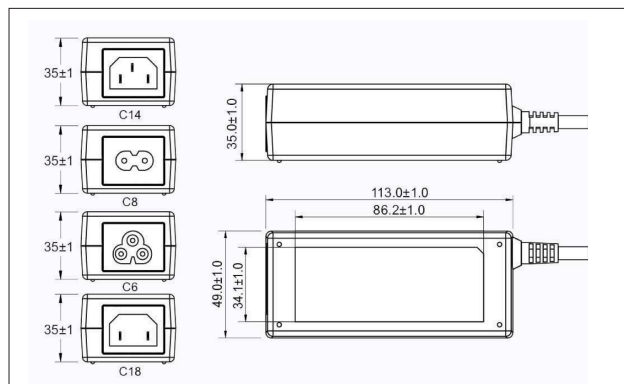

Case Size: 113L x 49W x 35H (mm)

AC Inlet: C14, C8, C6, C18

Weight: 300g

INNOVATIVE SPECIALTY DC POWER SYSTEMS

Standard and Custom Power Supplies from 5W to 10KW

TRAFFIC CONTROL POWER SUPPLIES



- 70-400+ Watts / 120 and 220 VAC Models Available
- CALTRANS TEES, NYSDOT, CDOT, GDOT Compliant for 332, 334, 336, 342, 344, and 346 Series cabinets
- RoHS and NEMA Compliant
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

CUSTOM POWER DISTRIBUTION ASSEMBLIES (PDAs)



- Compliant with TEES 2020
- 1U smaller than the PDA2-LX and PDA3-LX
- User accessible slots as specified
- Custom labeling and barcoding available
- Ruggedization against shock / vibration / humidity available

COMPACT PCI



- AC or DC input, 175W - 500W DC output, active PFC
- 3U x 8HP, 6U x 8HP sizes
- PICMG 2.11 compliant, UL/CSA, NEMKO/TUV/CE certified, ROHS compliant
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Industrial Computing, Military, Satellite Comm, Test, Transportation, Telecom, Aerospace

SPECIALTY HOT-SWAPPABLE POWER SUPPLIES



- 200-1500W, Universal Input, 5-54VDC Output
- Hot Swap, N+1, 90+% Efficiency
- 1U Form Factors
- 30+ Variations for Various Applications Including Nuclear
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

RACK POWER SYSTEMS



- 200W-1500W, 2-8 slots, single or mixed output voltages, up to 10KW total
- Single, dual, or individual unit AC or DC input
- Internally or externally redundant DC outputs
- Standard 19" and 23" size or user-specified configurations also available
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

CUSTOMS & MODIFIED STANDARDS



- 75W-2KW
- Single to 7 outputs
- Designed and built to custom or semi-custom specifications
- Ruggedization against shock/ vibration/ humidity optional
- Custom electrical specs, chassis, paint, labeling, connectors, interface all available

Primary Applications: Medical Equipment, Military, Test, Automotive, Computing, Audio, Sensitive Electronics

LOW NOISE CONVECTION / CONDUCTION COOLED POWER SUPPLIES



- 200W-500W, 90—264VAC full range input with 12-54 VDC Output
- Wide operating temperature range / high efficiency
- Small form factors
- Ruggedization against shock/ vibration/ humidity optional

Primary Applications: Medical Equipment, Military, IT, Sensitive Electronics

MEDICAL ADAPTERS



- 6W-250W, Efficiency levels V & VI
- Desktop, Wall-mount, and Interchangeable AC plug types
- Large selection of output connectors – additional cable lengths available
- UL60601 (medical) approved adapters available
- Ruggedization against shock/ vibration/ humidity optional

